


## Features

- It is a non-resettable thermal links which uses fusible alloy for its thermal element.
- It does not contain lead (Pb) and cadmium (Cd) in compliance with RoHS.
- It does not contain 163 substances of very high concern (SVHC) that are specified by REACH as of Jun. 2015.
- Extremely simple construction ensures reliability, and hermetically sealed thermal element reduces deterioration with age.
- It has superior thermal sensitivity.
- It uses an insulating container.
- Please feel free to ask us about cutting, forming and taping of lead wire.

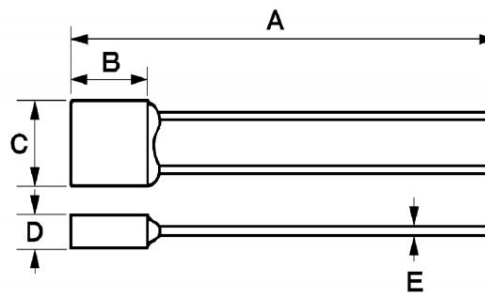

Lead length	Dimensions (mm)				
	A	B	C	D	E
Regular	55±3	4.0±0.5	5.2±0.5	2.2±0.3	0.53±0.02
Long	70±3	4.0±0.5	5.2±0.5	2.2±0.3	0.53±0.02

## Specification

Type No.	Rated functioning temperature Tf (°C)	Functioning temperature (°C)	Holding temperature Th (°C)	Maximum use temperature (°C)	Maximum temperature limit Tm (°C)	Electrical rating	
						Ampere (A)	Voltage (V)
SE	108	104±3	92	85	200	1	AC250
			89	82		1.5	AC125
S2	115	112±3	89	89	200	1	AC250
						1.5	AC125
SX	133	129±3	116	108	200	1	AC250
			115	107		1.5	AC125

SJ	145	141±3	123	120	200	0.8	AC250
----	-----	-------	-----	-----	-----	-----	-------

### Safety standard information

Type No.	Safety standard approval					
	PSE	UL	C-UL	VDE	CCC	KC
SE	JET5267-32001-1004 (AC250V)	E50082	E50082	40010816	2009010205322640 (AC250V)	SU05029-9007 (AC250V)
S2	JET5267-32001-1004 (AC250V)	E50082	E50082	40007547	2009010205322640 (AC250V)	SU05029-9007 (AC250V)
SX	JET5267-32001-1005 (AC250V)	E50082	E50082	40010816	2009010205322640 (AC250V)	SU05029-9005 (AC250V)
SJ	JET5267-32001-1006	E50082	E50082	40010816	2009010205323133	SU05029-9005

- Functioning temperature is measured with silicone oil bath of which temperature is increased at the rate of 1°C/min. Detecting current is 0.1A or less.
- Please feel free to contact us in regard of the details of safety standard approvals.